

WE CAN
CREATE **PRIVATE** AND
SECURE SPACE FOR YOU


PERGOLA

Cyprustente


www.cyprustente.com

GUHHER[®]
ALUMINYUM TEKNOLOJİLERİ


www.guhher.com

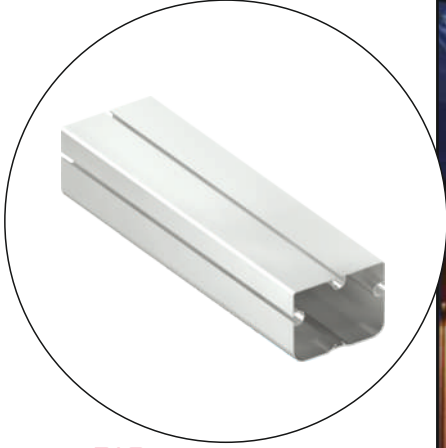


**BIG
CROSSBAR
PROFILES**
PR1005

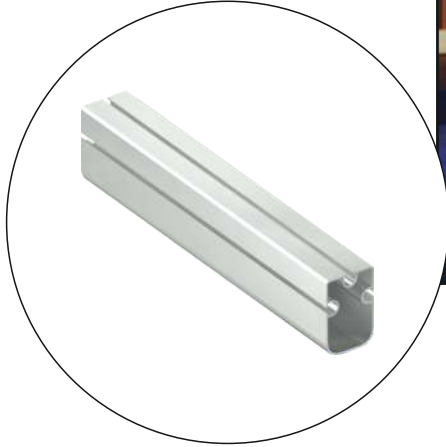


**SMALL
CROSSBAR
PROFILES**
PR1004

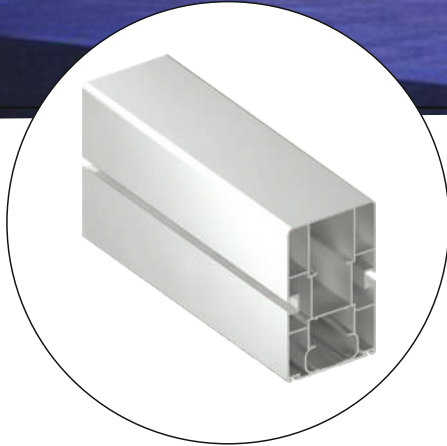

RAIL
PR1003

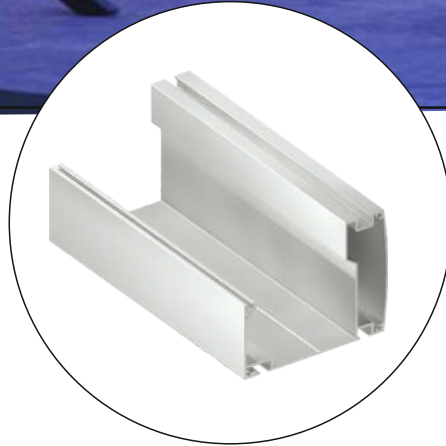

GUTTER
PR1002

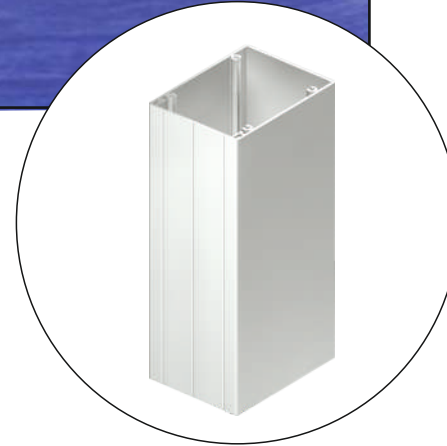


PILLAR
PR1001



www.guhher.com

Cyprustente
www.cyprustente.com

GUHHER
ALÜMİNYUM TEKNOLOJİLERİ®

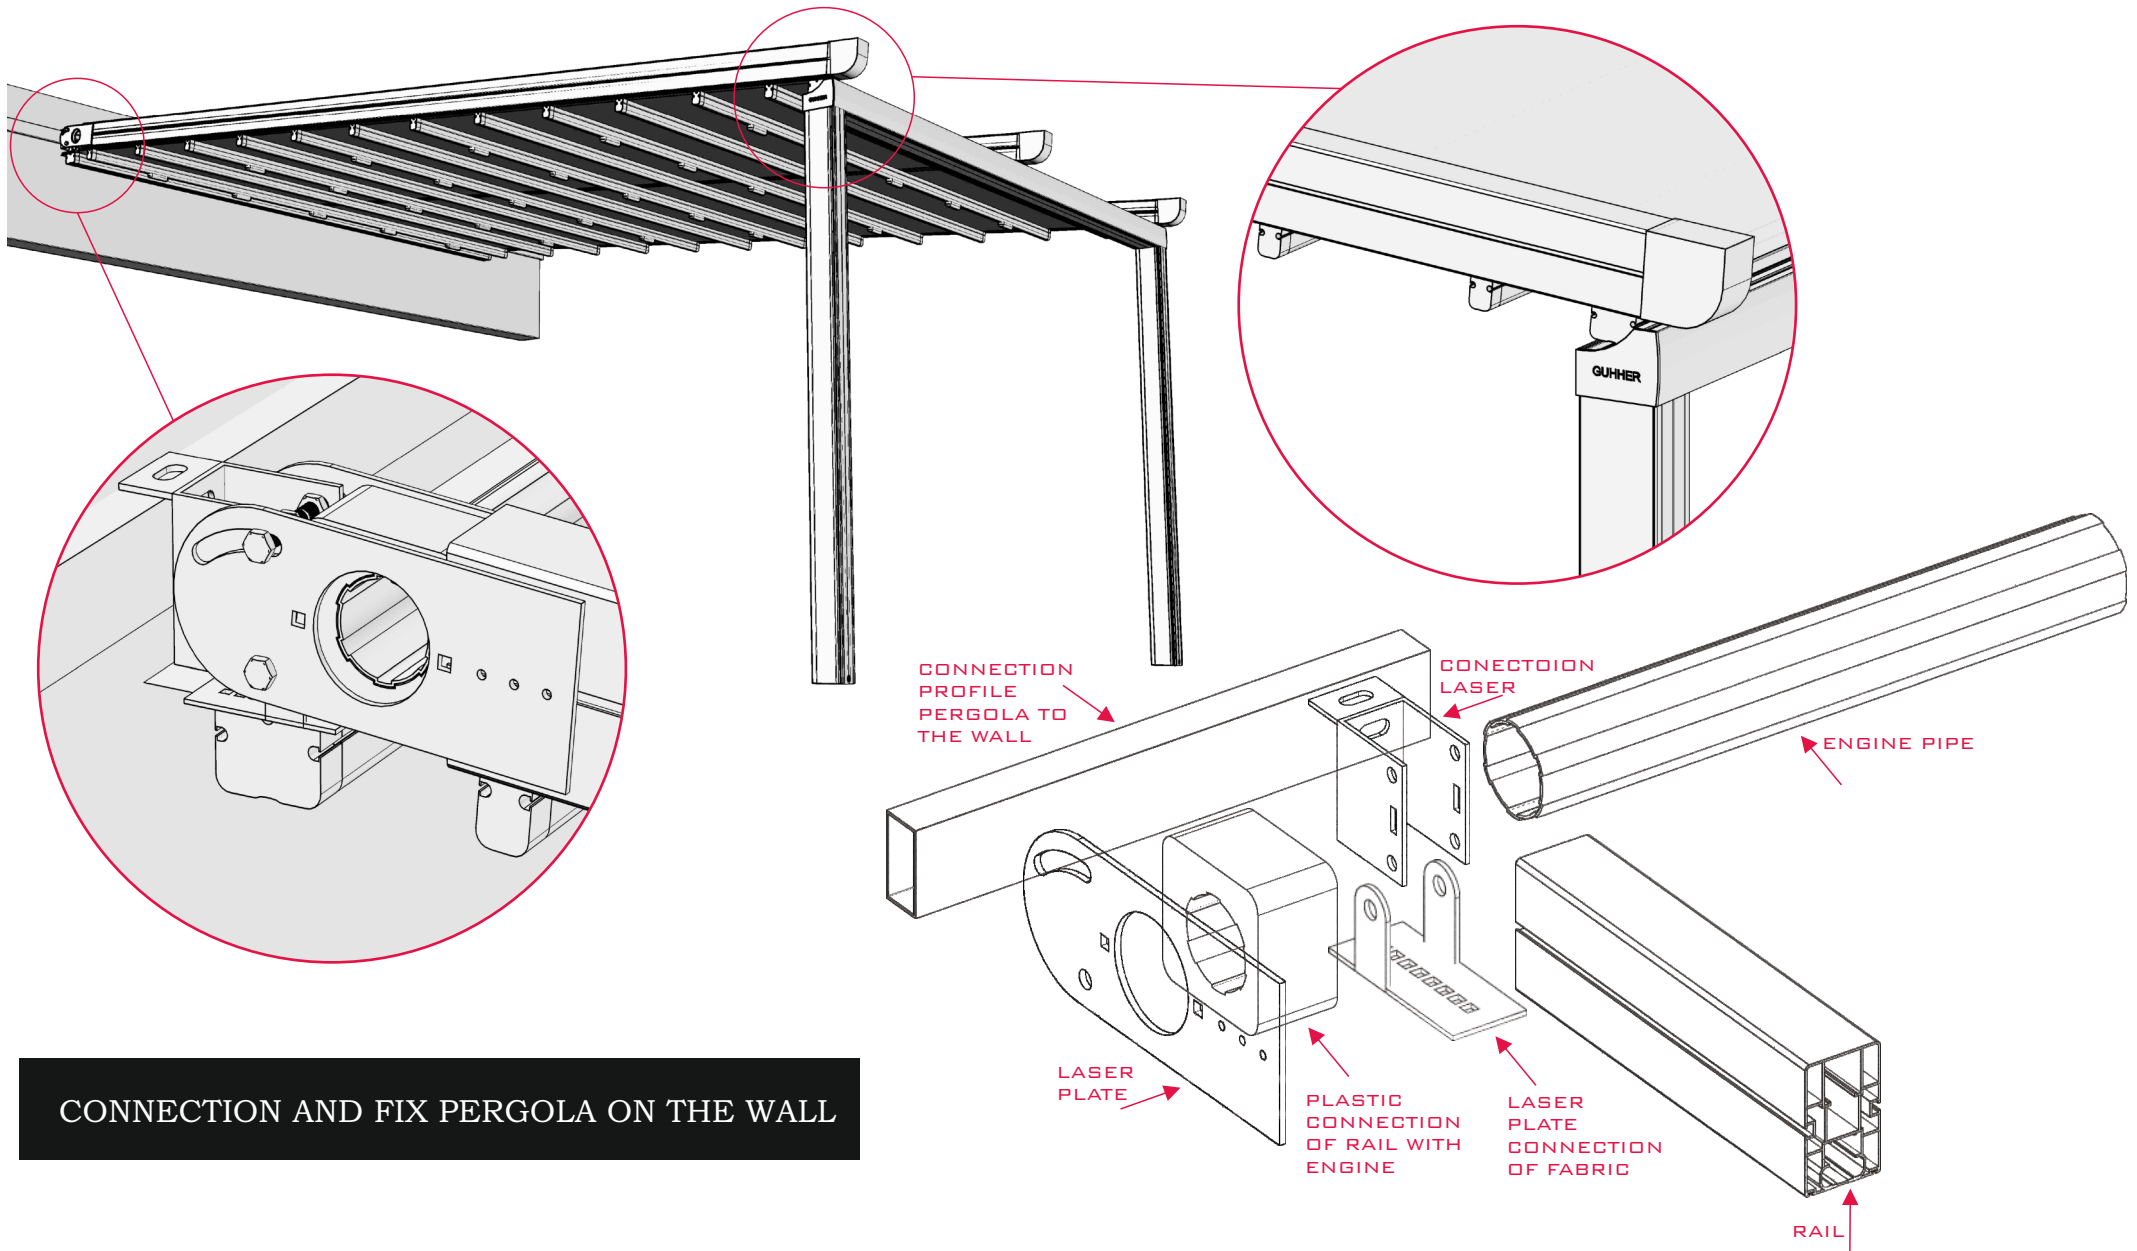










CONNECTION AND FIX PERGOLA ON THE WALL



www.guhher.com

Cyprustente
www.cyprustente.com


GUHHER[®]
ALÜMİNYUM TEKNOLOJİLERİ

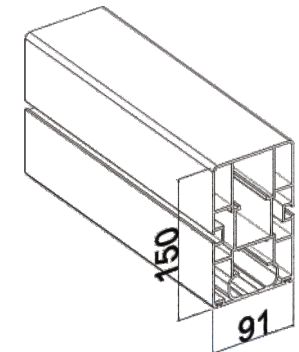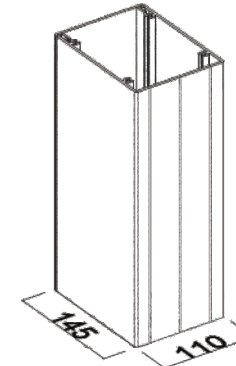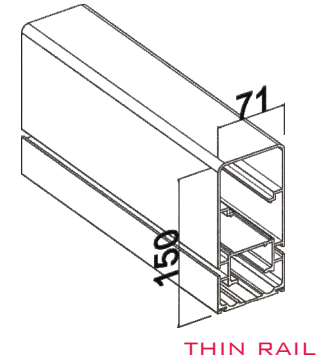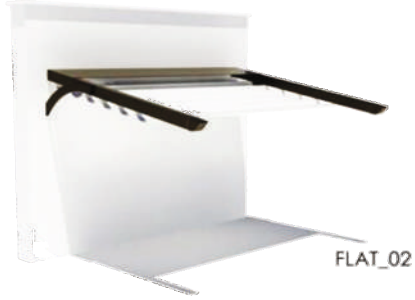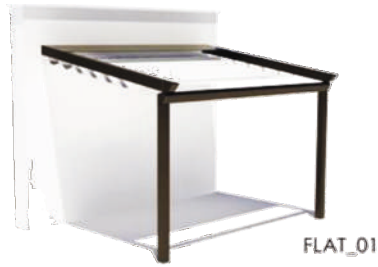

www.guhher.com

Cyprustente
www.cyprustente.com

GUHHER
ALÜMİNYUM TEKNOLOJİLERİ

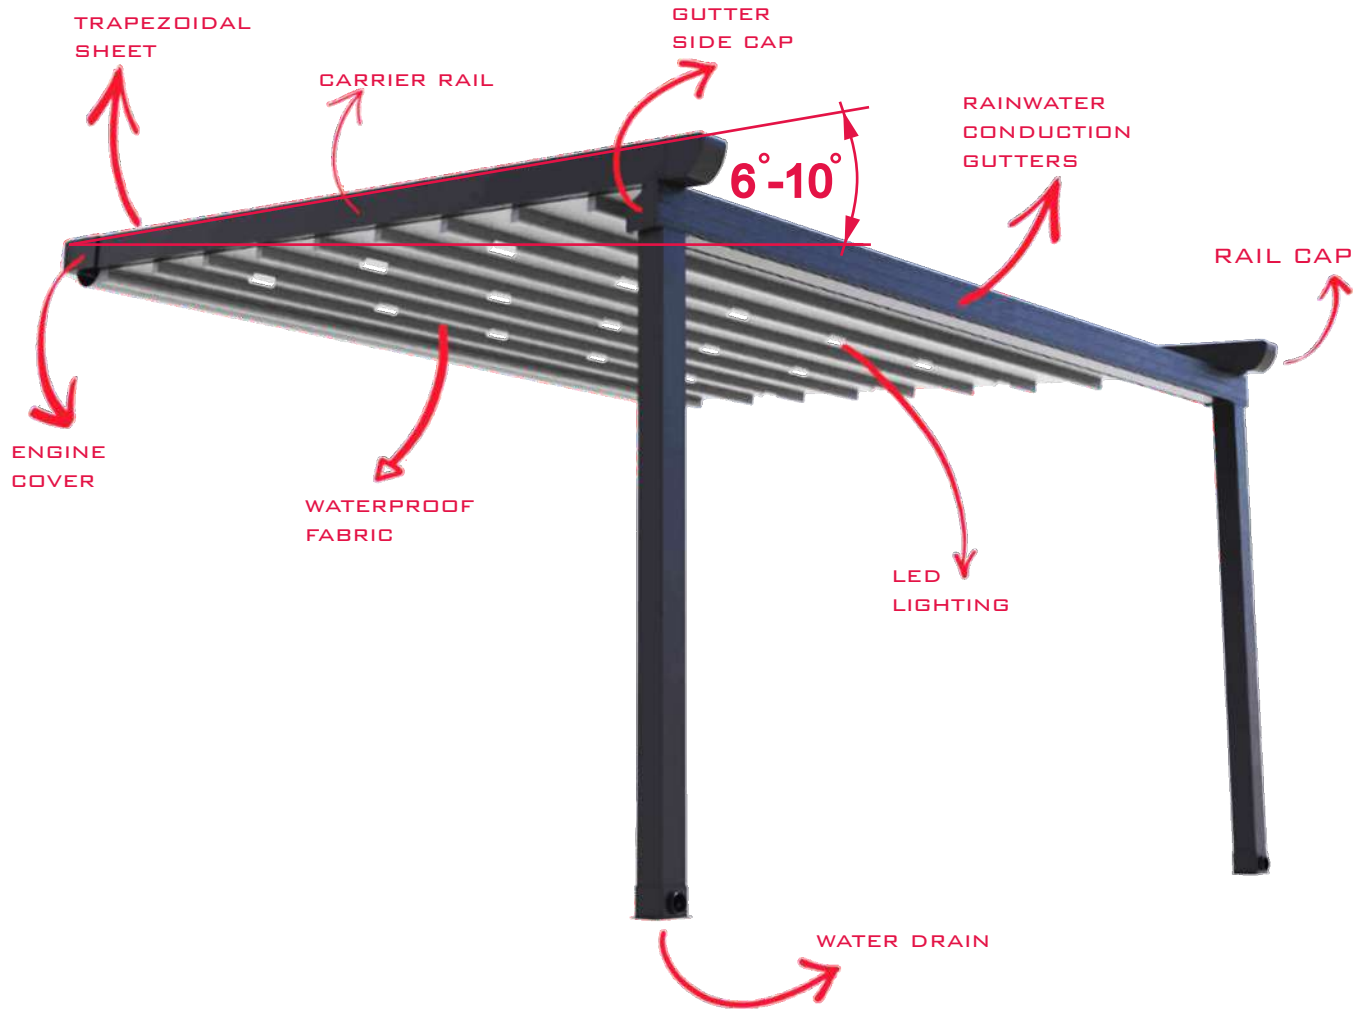

www.guhher.com

Cyprustente
www.cyprustente.com

GUHHER
 ALÜMİNYUM TEKNOLOJİLERİ

Pergola Led Lighting

professional led system



YOU CAN CHOOSE THE COLOR YOU LIKE
ACCORDING TO THE BUILDING

EN	TEST METHOD	PHFR 870
Base Fabric		PES
Coating		PVC
Yarn (Denier)		1000x1000
Weaving		10x10
Total Weight (gsm)	TS 251:1991 METOT 6	870
Width (cm)		250, 300, 320
Tensile Strength (N/5 cm)	TS 2008 EN ISO 1421:2000 METOT 1	2300/2400 (Warp/Weft)
Tear Resistance (N)	DIN 53363	330/280 (Warp/Weft)
Adhesion (daN/5 cm)	EN ISO 2411	7
Light Fastness	ISO 105 B04:1994	6+
Water Resistance (mmSS)	TS 257 EN 20811:1996	Min. 8000
Wear	TS EN 530:2011	Min. 9000 Rotation
Temperature Resistance		-40C +70C
Flame Retardancy	DIN4102-B2, ISO 6941:2003	PASS



ALUMINUM COLORS



www.guhher.com

Cyprustente
www.cyprustente.com

GUHHER
ALÜMİNYUM TEKNOLOJİLERİ



www.guhher.com

Cyprustente
www.cyprustente.com

GUHHER
ALÜMİNYUM TEKNOLOJİLERİ

GUHHER[®]
ALGHIYUN TEKNOLOJISI

Cyprustente

www.cyprustente.com

